



KONGSBERG

cNODE[®] Modem MiniS



cNODE[®] Modem MiniS

The cNODE[®] Modem MiniS is designed for the Point 2 Point transfer of data between two cNODE's or to a surface vessel equipped with any HiPAP[®] and μ PAP[®] systems. The data telemetry operates on CYMBAL digital protocols, Kongsberg field proven robust propriety link.

One cNODE[®] Modem MiniS can address several other cNODE[®] Modems during operation using the Kongsberg Link User Protocol. The data telemetry operates on CYMBAL, Kongsberg's field proven and robust proprietary link. Data rates of up to 6 kb/s are available. The cNODE[®] Modem MiniS is simple to configure with the TTC Light software.

The cNODE[®] housing rated for 4000m is manufactured in coated anodized aluminium. Transducer options include an 180 degree omni directional and 40 degree vertical transducer to ensure the link can be optimized based on water depth and environment.

FEATURES

- Transparent Modem function
- High speed telemetry capabilities
- Modem interface: RS-232/485/422
- Cymbal channels (560+)
- SSBL and LBL positioning
- Range measurements between transponders
- 4000 meter depth rated
- 34-180 has 180° omnidirectional beam
- 34-40V has 40° narrow beam
- Coated anodised aluminium housing
- Internal rechargeable Li-Ion battery (optional without battery)
- Battery charger: 0-100 % in one hour
- External Power; 24 VDC (20 - 28V), 1A, 24 W
- External connector for configuration and software update
- Transmitting power; High, Low, Min (6 dB steps)
- External on/off function
- Internal tilt sensor $\pm 90^\circ$
- Pressure relief valve (safety device)
- Frequency band 21-31 kHz
- Operating temperature -5°C to +55°C

TECHNICAL SPECIFICATION

MODEL	cNODE® Modem MiniS 34-180	cNODE® Modem MiniS 34-40V
KM ITEM NUMBER	425260	417930
DIMENSIONS (Length X Diameter)	306 x 105 mm	321 x 105 mm
WEIGHT IN AIR / WATER	4 kg / 2.1kg	4.6 kg / 2.1 kg
MAX. DEPTH RATING	4000 m	4000 m
RANGE CAPABILITY	1000 m	4000 m
BEAM WIDTH	180°	40° vertical
SOURCE LEVEL - HIGH	182 dB	197 dB
TRIGGER LEVEL	< 85 dB	< 80 dB


MODEM

FREQUENCY BAND	21 - 31 kHz
ACOUSTIC SPEED, CYMBAL	Up to 6,0 kbit/s, selectable for adaption to acoustic channel conditions
DATA INTERFACE	RS-232, RS-485 or RS-422 (isolated / non-isolated)
CONFIGURATION SOFTWARE	TTC Light software
ACTIVE CONTROL DURING OPERATION	Kongsberg Link User Protocol

POWER

INTERNAL BATTERY	Lithium-Ion, Quiescent battery lifetime 30 days
EXTERNAL POWER	24 VDC (20 - 28 V), 1A, 24 W (Charging during operation)
TRANSMITTING POWER (MAX)	100 W
STANDBY POWER	<100 mW
EXTERNAL CONNECTORS	Seacon

Outline drawings for the
cNODE® Modem MiniS

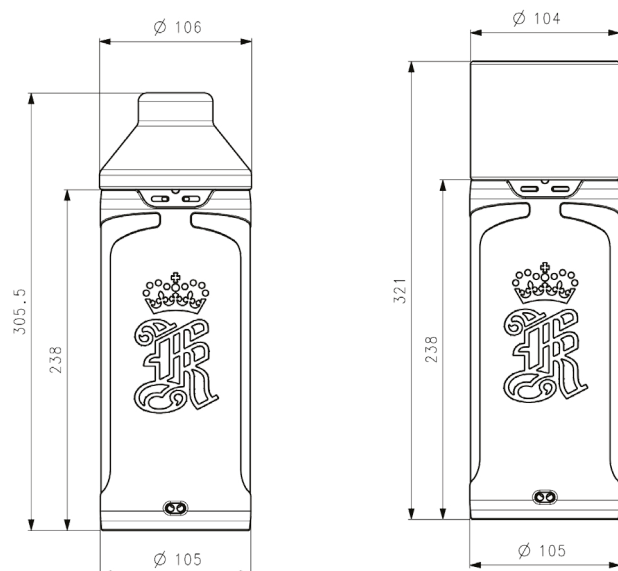

Specifications subject to change without any further notice.